
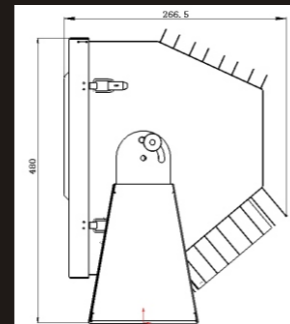



聚光型 / Spot light type

户外小型电脑变色龙灯 Outdoor low power chameleon light

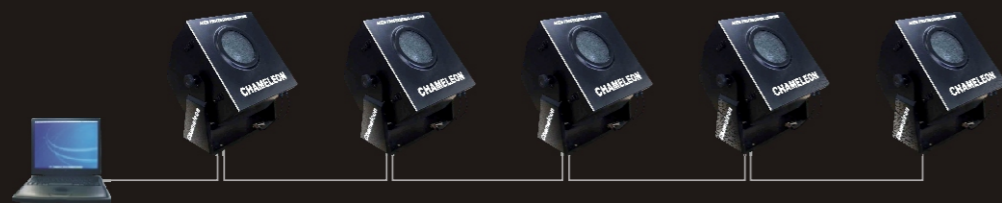

技术参数

- 型号: GBS-CDM150W, GBS-MSD250W, GBS-MSR575W
- 光源: CDM150W, MSD250W, MSR575W (进口光源)
- 光束角: 0~20° 手动可调
- 旋转角度: X-轴360° 手动, Y-轴160° 手动
- 换色系统: CMY无限混色
- 通讯信号: DMX512
- 控制方式: 主从控制: 多台同步变色(内置32个自动演示程序)DMX512控制台控制: 多部编程控制变色
- 用途: 主要适用于户外白色或浅色建筑、立柱、天然溶洞、文化古迹、雕塑、桥梁、别墅等

Technical features

- Model type: GBS-CDM150W, GBS-MSD250W, GBS-MSR575W
- Bulb: CDM150W, MSD250W, MSR575W (philips brand)
- Beam angle: 0~20° can manual adjust
- Rotation angle: X-axis 360° manual adjust, Y-axis 160° manual adjust
- Colour change system: CMY unlimited mix color
- Communication signals: DMX512
- Control mode: Main and following machine control: One chameleon as the host, By its signals to control other chameleon operate, Achieve simultaneous effects. (Built-in 32 automatic demo procedure)
- DMX512 Signal control: Programming in every light control
- Applications: Mainly use for outdoor white buildings, stand column, natural cave, historic site, sculpture, bridge, villadom etc



Ch1	C 青色	
Ch2	M 洋红	
Ch3	Y 黄色	
Ch4	CMY 变色速度	FAST SLOW
Ch5	复位	

规格型号 Model type	GBS-CDM150W	GBS-MSD250W	GBS-MSR575W
光源功率 Power	CDM150W	MSD250W	MSR575W
电 源 Power source	AC220V ± 5% / 50 (P+N+E)	AC220V ± 5% / 50 (P+N+E)	AC220V ± 5% / 50 (P+N+E)
色 温 Color Temperature	4200/6000k	6700k	6000k
光通量(白光) Luminous flux(white color)	12900lm	18000lm	43000lm
有效距离 Effective distance	≤20m	≤30m	≤50m
温控保护温度 Temperature control	125°C	125°C	125°C
变色系统 Color change system	CMY无限混色 CMY Infinite mixed color	CMY无限混色 CMY Infinite mixed color	CMY无限混色 CMY Infinite mixed color
DMX512通道数 DMX512 channel	5CH	5CH	5CH
防护等级 Protect level	IP54	IP54	IP54
包装尺寸 Package size	475 × 290 × 490mm	475 × 350 × 490mm	475 × 290 × 490mm
重 量 Weight	19kg	20.5kg	26kg