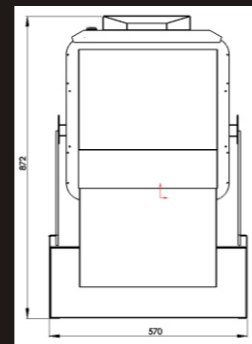
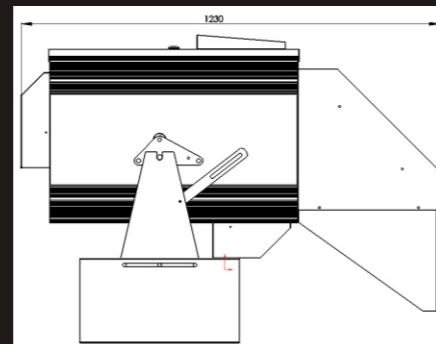
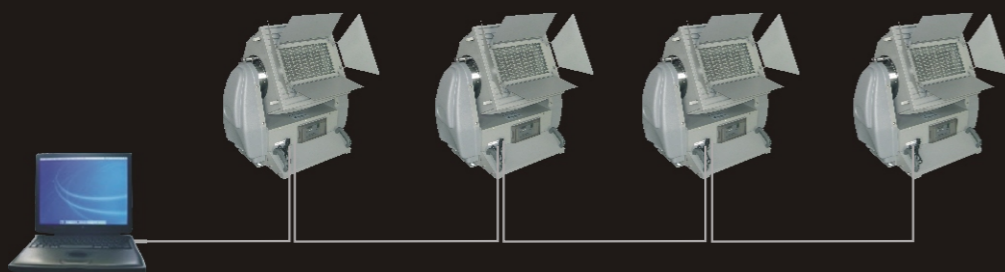
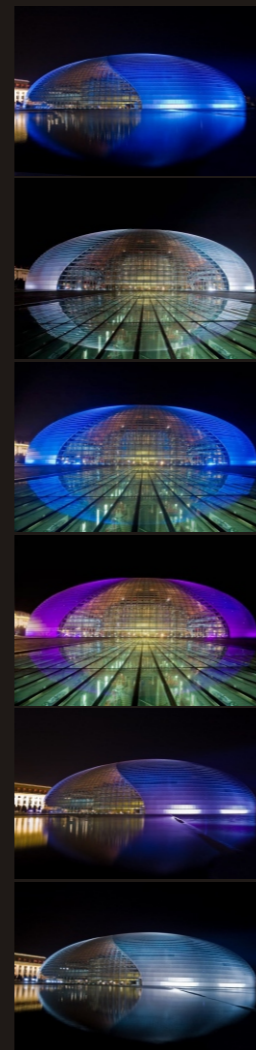


泛光型 / Flood light

户外大型电脑变色龙灯
Outdoor big power chameleon light

技术参数

- 型号: GBS-MHN1800W, GBS-HMI2500W, GBS-HMI4000W
- 光源: MHN-1800W, HMI2500W, HMI4000W (进口光源)
- 光束夹角: X: 50°, Y: 20°
- 旋转角度: X-轴360° 手动, Y-轴60° 手动
- 换色系统: CMY无限混色+ (光闸)
- 通讯信号: DMX512
- 控制方式: 主从控制: 多台同步变色(内置32个自动演示程序)
- DMX512控制台控制: 多部编程控制变色
- 用途: 主要适用于户外白色建筑、喷泉, 天然溶洞、文化古迹、雕塑、桥梁、别墅等

Technical features

- Model type: GBS-MHN1800W, GBS-HMI2500W, GBS-HMI4000W
- Bulb: MHN-1800W, HMI2500W, HMI4000W (Philips brand)
- Beam angle: X, 50° Y, 20°
- Rotation angle: X-axis 360° manual adjust, Y-axis 60° manual adjust
- Color change system: CMY unlimited mix color + (optical shutter)
- Communication signals: DMX512
- Control mode: Main and following machine control: One chameleon as the host, By its signals to control other chameleon operation, Achieve simultaneous effects. (built-in 32 automatic demo procedure)
- DMX512 Signal control: Programming in every light control
- Applications: Mainly use for outdoor white buildings, stand column, natural cave, historic site, sculpture, bridge, villadom, etc

DMX512通道

DMX512 channel standard

Ch1	C 青色 / cyan	
Ch2	M 洋红 / magenta	
Ch3	Y 黄色 / yellow	
Ch4	CMY 变色速度 CMY colour change speed	
Ch5	复位 / Reset	



规格型号 Model type	GBS-MHN1800W	GBS-HMI2500W	GBS-HMI4000W
光源功率 Power	MHN1800W	HMI2500W	HMI4000W
电源 Power source	AC220V ± 5% / 50 (P+N+E)	AC220V ± 5% / 50 (P+N+E)	AC380V ± 5% / 50Hz (3P+N+E)
色温 Color Temperature	5600k	6000k	6000k
光通量(白光) Luminous flux(white color)	160000lm	240000lm	410000lm
有效距离 Effective distance	≤30m	≤30m	≤50m
温控保护温度 Temperature control	125°C	125°C	125°C
变色系统 Color change system	CMY无限混色 CMY Infinite mixed color	CMY无限混色 CMY Infinite mixed color	CMY无限混色 CMY Infinite mixed color
DMX512通道数 DMX512 channel	5CH	5CH	5CH
防护等级 Protect level	IP44	IP44	IP44
外观尺寸 Light size	690×520×700mm	475×350×490mm	910×864×560mm
包装尺寸 Package size	770×550×760mm	475×350×490mm	910×630×1070mm
重量 Weight	75kg	83kg	140kg